

5g micro module

The pole can be reserved for moile, unicom, telecom, tower communication base station as relay coverage.

Extended access: infrared sensor, radar, traffic monitoring sensor, RFID communication.

Intelligent lighting control

Realize intelligent control of lamps, dimming, switching, voltage, current, power, electricity statistics, ault warning, energy consumption analysis, GIS map, stategy control, loop monitoring, etc.

Environmental monitoring

Intelligent street light are equipped with a variety of sound sensors, air pollution detector temperature sensor, brightness sensor, etc., used for wind direction, wind speed, temperature, rainfall, water level, and noise to achieve intelligent detection of the urban environment and weather.

The street lamp is embedded with WIFI base station to achieve the coverage of WIFI hotspots in the whole area, dual-frequency communication 2.4G/5G coexistence, well development access to 200 points, the distance of 70M, suppo the operation system, can be extended probe application, traffic statistics and

Support one-touch calling can directly talk to monitoring room.

Intelligent charging pile

Built-in lamp pole, international interface, support platform statistics management, support APP self-charge, support process managment, operation level, monthly settlement.

Built-in 30W waterproof sound column, support background music, support emergency broadcasting, support timing and monitoring room microphone polling and dialogue.

3 million HD ball machine, support 360 degree rotation, support 1080P HD, support local storage, support SMART detection: area instrusion detection, boundary detection, audioabnormal detection, mobile detection, video acclusion detection function, support NVR, support access to the pubilc security network, support video data later analysis (depending on the actual industry application) support remote view.

Electrionic advertising screen

LED has been widely valued and developed rapidly, is inseparable from its own advantage. These advantages are summarized as: hight brightness, low operating voltage, low power consumption, miniaturization, long life, impact resistance and stable performance. The development prospect of LED is very broad, and it is developing towards higher brightness, higer weather resistance, higher luminous density, 3 higher luminous uniformity, reliability and panchromatic direction.



Protection Grade

Rated Power 30-100W

Input Voltage Lifespan 110-220vAc 50000hrs

IP65

Moon Ring



Moon ring



white cover/module style
THE RING

Protection Grade IP65
Rated Power 50W
Input Voltage 110-220vAc
Lifespan 50000hrs



The ring



Utility model/solar model
THE LIGHT OF THE MILKY WAY

Protection Grade IP65
Rated Power 30-60W
Input Voltage 110-220vAc
Lifespan 50000hrs



The light of the milky way

Product characteristics

Garden lighting.XiangYun.

This is the most beautiful cloud under the blue sky, the beautiful scenery around you during the day, and the brightest lamp in front of you at night. The luminaire modeling elements are charming, the luminous surface is the light source is also the design point, like the universe galaxy when lit up.

> In line with the Western aesthetics while retaining the eastern flavor. Material selection of high strength die-cast alunminum alloy shell. Modern and simple design is suitable for any scene.



Protection Grade Rated Power 30-120W

Input Voltage 110-220vAc Lifespan 50000hrs


IP65

XIANGYUN

10



XIANGYUN 11

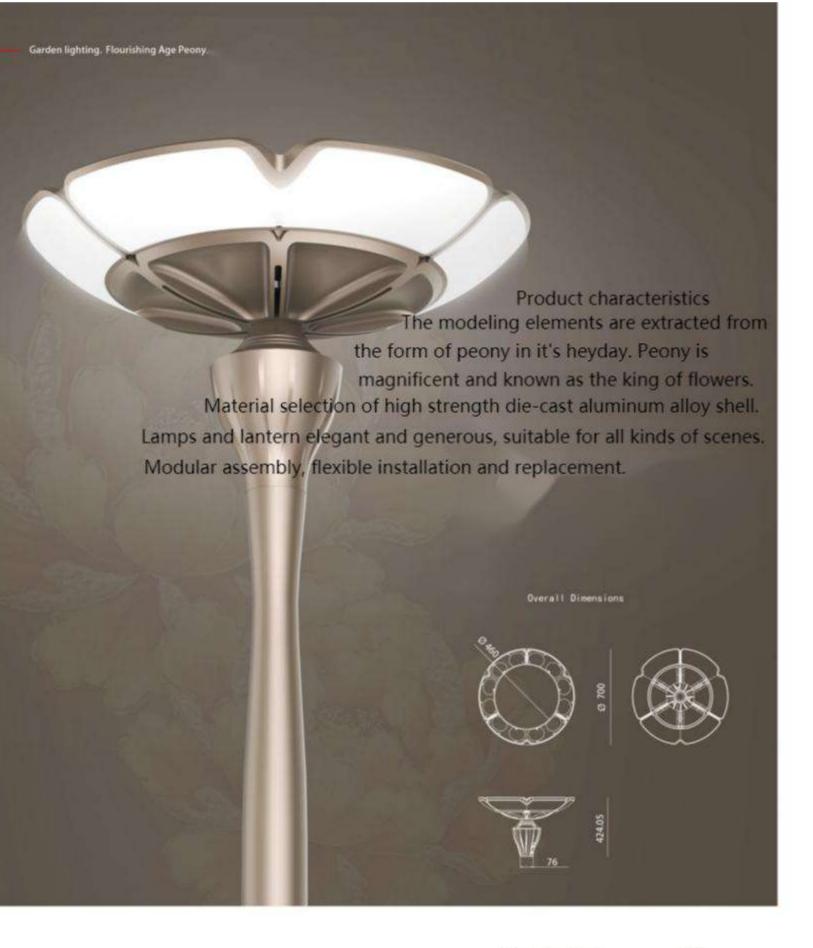


Protection Grade Rated Power Input Voltage Lifespan 1P65 60-180W 110-220vAc 50000hrs



Flourishing Age Peony

Flourishing age peony

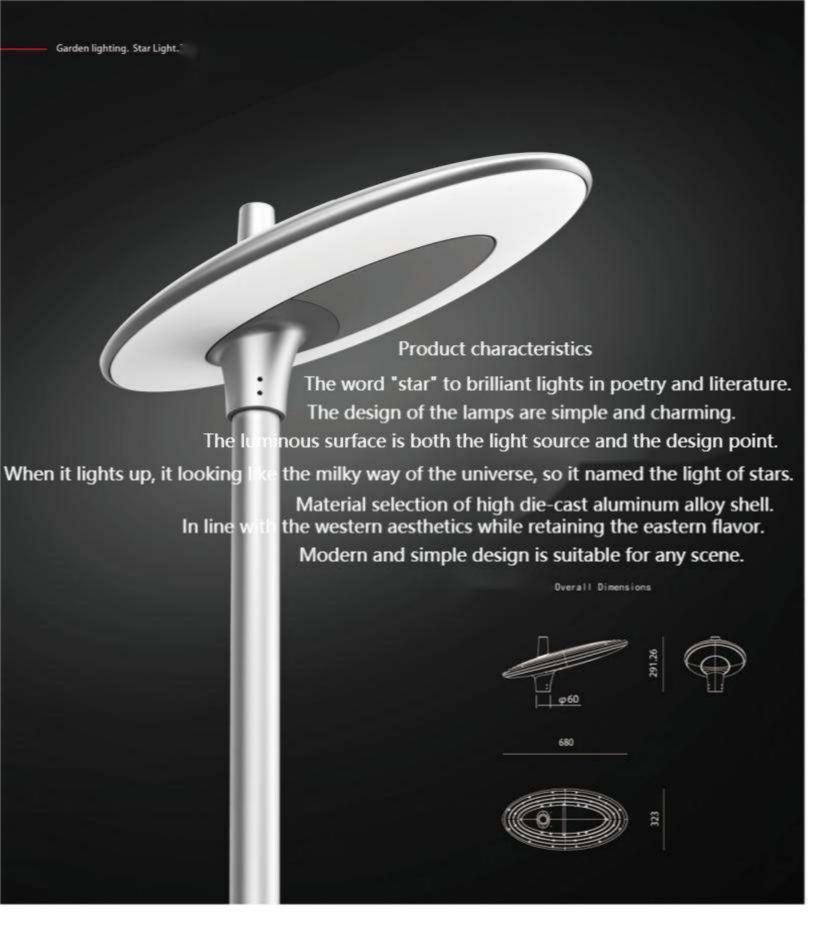


Front mounting

Star Light

Protection Grade Rated Power Input Voltage Lifespan 30-100W 110-220vAc 50000hrs




Star light--front mounting

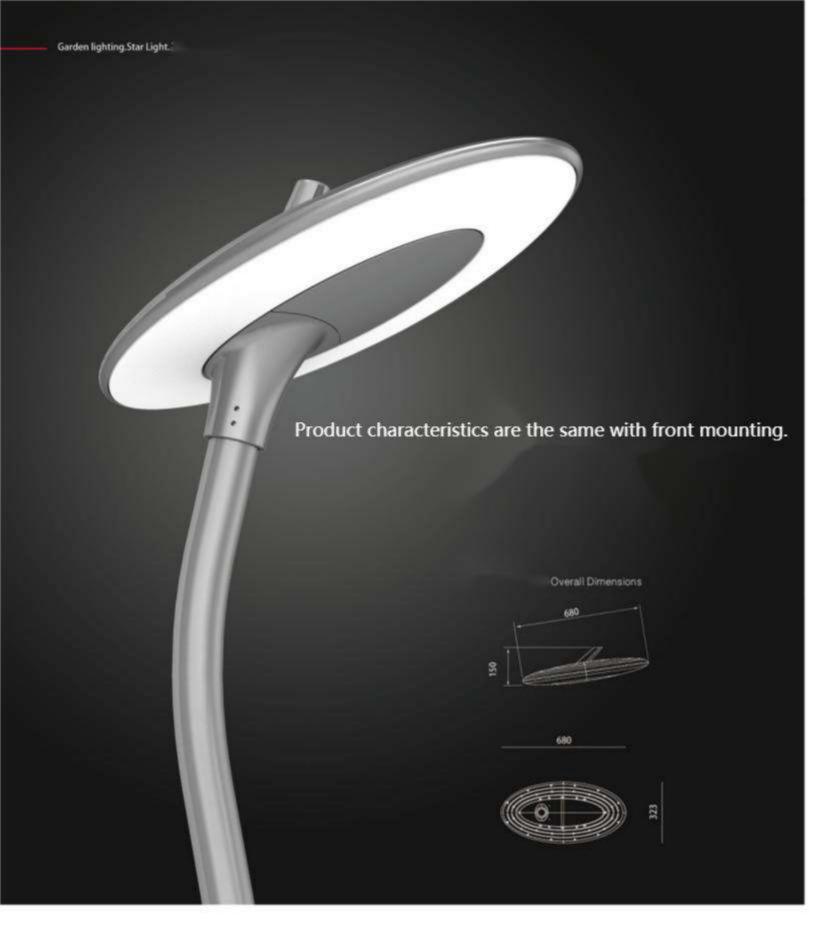


Side mounting Star Light Protection Grade Rated Power Input Voltage Lifespan

30-100W 110-220vAc 50000hrs

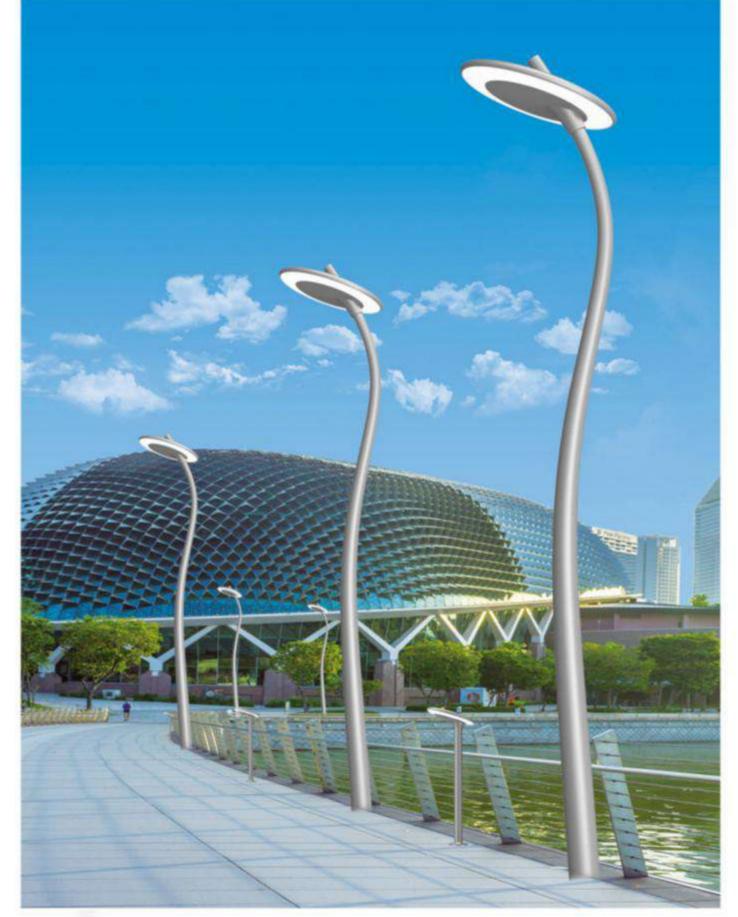

Star light--side mounting

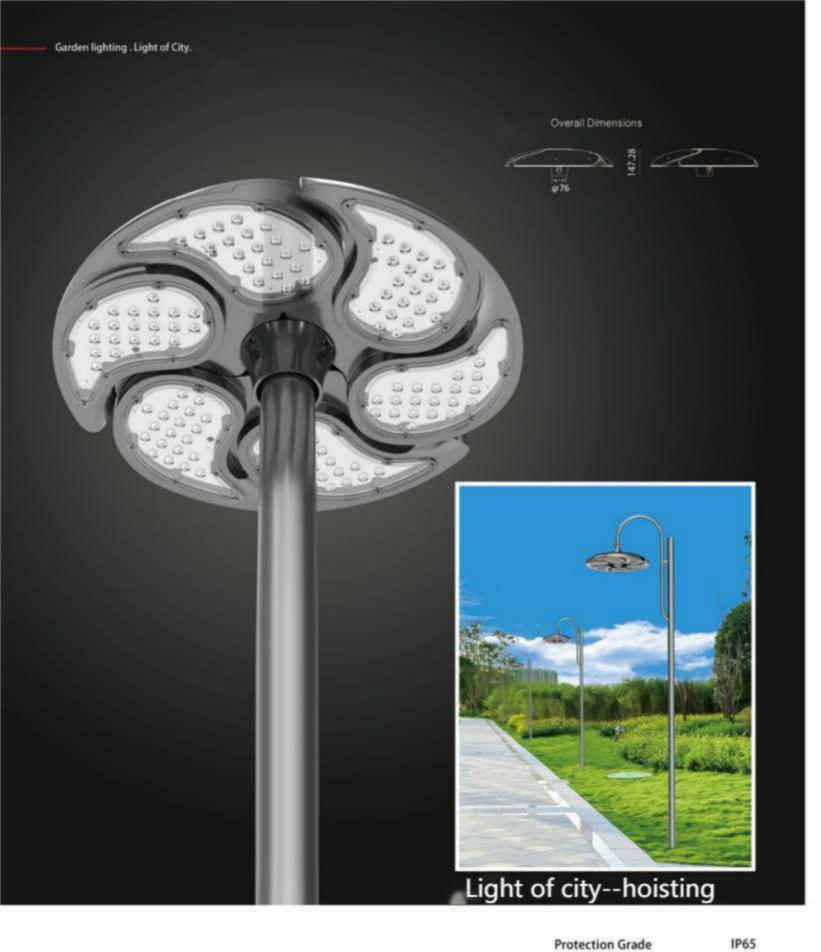

Rated Power Input Voltage 1

Input Voltage 110-220vAc Lifespan 50000hrs

30-120W

Light of City



Light of city--front mounting



Star light--side mounting



Light of city



Star light--front mounting



The light of the milky way



The ring module style



Xiangyuan



Moon ring



Flourishing age peony

Star Light Lawn Lamp



Material: Die-cast aluminum

Model: Moon light lawn lamp Light source type: LED Power: 5W-10W Size: L280*W250*H800 Voltage: < 36W or = 36W Protection grade: IP65




Material: Die-cast aluminum


Model: Star light lawn lamp

Light source type: LED Power: 5W-10W Size: L290*W145*H700 Voltage: < 36W or = 36W Protection grade: IP65













Local figure

size





24



Model: Peony/Xiangyun lawn lamp Light source type: LED

Power: 5W-10W Size: L280*W250*H800 Material: Die-cast aluminum

Protection grade: IP65 Voltage: < 36W or = 36W





moon ring H750 Power: 5-20W Straight rod rod diameter:50



moon ring H820 Power: 5-20W cone rod upper diameter50/lower89



Flourishing peony H680/power 5-20W Straight rod/rod diameter 60



Star light H700/power 5-20w Straight rod/rod diameter 50





Star light H680/power 5-20w Flourishing peony H680/power:5-20w cone rod/upper diameter50/lower89 cone rod/upper diameter50/lower89



Xiangyun H680/power: 5-20w Straight rod/rod diameter 60



Xiangyun H720/power 5-20w



Flourishing peony H680/power 5-20w Cone rod/upper diameter50/lower89 Cone rod/upper diameter50/lower89